



Product Data Sheet

T-2000 Phenolic w/ ASJ Vapor Barrier Jacket

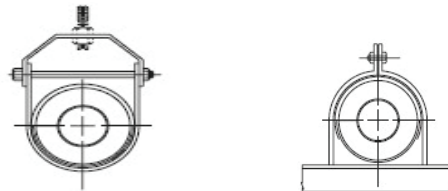

Design Data	
Temperature Range: Zero to 200 F	
Insulation: Phenolic Foam ASTM C-1126 Tpe III	
.5" to 2.5"	= 35 PSI At Load Point
3" to 6"	= 80 PSI At Load Point
8" to 12"	= 120 PSI At Load Point
Vapor Barrier: ASJ ASTM C1136	
Jackets: G90 Galvanized Steel ASTM A-527	
Glue: 3M Fastbond 49 (water based adhesive)	
<i>For higher load ratings, see T-4000</i>	
R Value per 1" thickness = 6	
K Factor @ 75 F = .15	

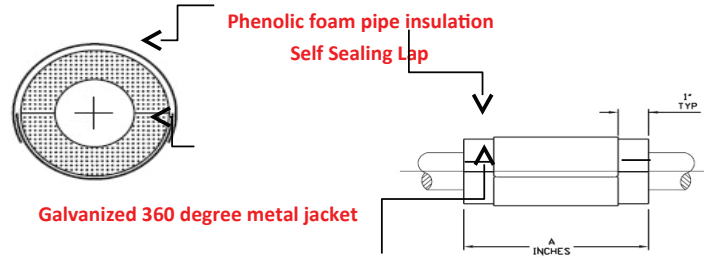

CLEVIS HANGER

FLAT SURFACE

Intended for installation on flat surfaces or clevis pipe hangers

***25/50 Rated Flame/Smoke Plenum Rated**

BUY AMERICAN ACT CERTIFIED

Pipe Size	Maximum Load Ratings (lbs)		A = Insulation Length										Copper Tubing Size OD		
	On Flat Surface	In Clevis Hangar	1/2		1		1 1/2		2		2 1/2			3	
			A	B	A	B	A	B	A	B	A	B		A	B
5/8	40	40	6	24	6	24	6	24	6	24	6	24	6	24	5/8
1/2	40	40	6	24	6	24	6	24	6	24	6	24	6	24	7/8
3/4	40	45	6	24	6	24	6	24	6	24	6	24	6	24	1 1/8
1	55	65	6	24	6	24	6	24	6	24	6	24	6	24	1 3/8
1 1/4	70	80	6	24	6	24	6	24	6	24	6	24	6	24	1 5/8
1 1/2	90	100	6	20	6	20	6	20	6	20	6	20	6	20	2 1/8
2	110	125	6	20	6	20	6	20	6	20	6	20	6	20	2 5/8
2 1/2	125	180	6	18	6	18	6	18	6	18	6	18	6	18	3 1/8
3	150	225	6	18	6	18	6	18	6	18	6	18	6	18	3 5/8
3 1/2	200	300	6	18	6	18	6	18	6	18	6	18	6	18	4 1/8
4	250	300	6	16	6	16	6	16	6	16	6	16	6	16	5 1/8
5	See T-4000	490	-	-	6	16	6	16	6	16	6	16	6	16	6 1/8
6		600	-	-	6	16	6	16	6	16	6	16	6	16	
8		750	-	-	9	16	9	16	9	16	9	16	9	16	
10		875	-	-	9	16	9	16	9	16	9	16	9	16	
12		1000	-	-	9	16	9	16	9	16	9	16	9	16	

The load ratings represent average values obtained in accordance with accepted methods and are subject to normal manufacturing variations

- Dimensions and ratings are subject to change without notice -

For Use On: Chilled Water - Domestic Cold - Domestic Hot - Hot Water Heating

Design Features
Compact - Easy Installation - Minimizes Heat-loss and/or Condensation

Contact Information: 425-330-3765 Fax 360-925-3400 www.thermalpipeshields.com



FULL BOX QUANTITIES

T-2000 Phenolic with ASJ

PIPE SIZE	WALL 1/2"	WALL 1"	WALL 1 1/2"	WALL 2"
5/8"	32	32	18	10
1/2"	22	28	18	27
3/4"	18	28	18	27
1"	40	20	10	21
1 1/4"	28	20	27	21
1 1/2"	28	14	27	12
2 1/8"	28	14	27	15
2"	20	12	21	15
2 5/8"	20	12	21	15
2 1/2"	14	27	15	12
3 1/8"	14	27	15	12
3"	10	18	15	12
4 1/8"	27	15	12	6
4"	18	15	12	6
5"	10	12	6	6
6 1/8"	8	6	6	6
6"	8	6	6	6
8"	6	4	4	4
10"	4	4	4	2