




F-2000 Phenolic Foam Insulated Pipe Support

Product

- F-2000 Phenolic Foam Insulated Pipe Support is fabricated from closed cell, fire and moisture resistant rigid thermal insulation.
- F-2000 features a factory adhered ASJ+ vapor retarder with a longitudinal SSL closure strip for use on below ambient temperature process piping.
- The entire circumference of the pipe insulation is covered with a two-piece galvanized steel shield with the insulation and vapor retarder being 2" longer than the metal shield.
- Low thermal conductivity provides superior insulating performance for mechanical piping systems operating between 0°F and 220°F.
- See current Therma-Phen® data sheet for full physical property and compliance listings.

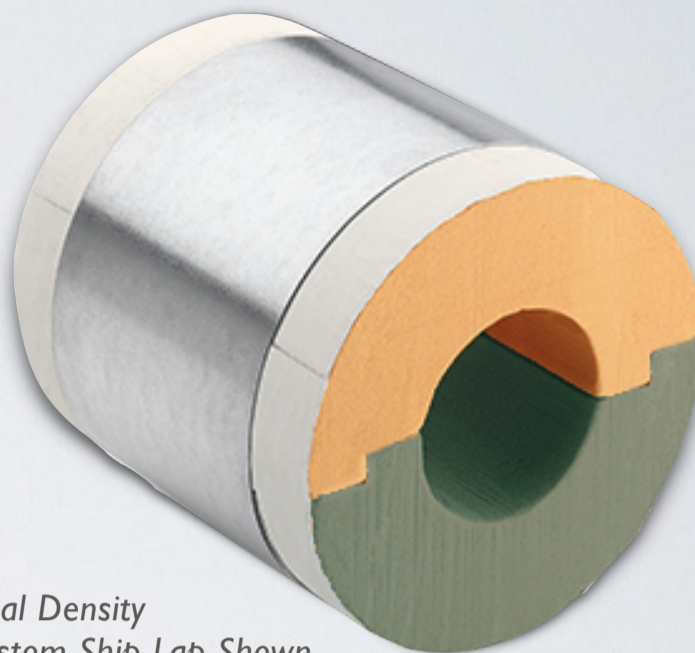

**Dual Density*

**Custom Ship Lap Shown*

Features

- Therma-Phen® phenolic foam is a cost-effective choice that provides excellent thermal protection and enhanced fire resistance compared to other insulations such as XPS, PIR or cellular glass.
- Meets 25/50 flame spread/smoke developed requirements for use within commercial building return air plenums (up to 3" wall thickness).
- Phenolic foam inserts utilize the density of the bottom section at the load point in accordance with the following standard schedule:
- 5/8" to 2.5" pipe = 2.5 PCF nominal (32+ psi)
- 3 1/8" to 6" pipe = 5 PCF nominal (85+ psi)
- 8" to 12" pipe = 7 PCF nominal (135+ psi)
- Metal shield roll formed from G90 galvanized steel per ASTM A-527

Applications

- F-2000 Phenolic Foam Insulated Pipe Supports are commonly used on chilled water, domestic cold, domestic hot, hot water heating, rain water leaders, condensate drains and HVAC refrigeration piping in commercial buildings.
- Meets the compressive strength requirement of MSS SP-58 as a "high strength insert" allowing for reduced lengths and metal shield gauge through pipe hangers.
- Insulated pipe supports are more labor effective compared to the traditional method of the insulator lowering the clevis hanger, field notching the fiberglass pipe cover and then installing a wood or high density fiberglass block and curved metal shield at each structural pipe hanger.
- The most labor effective workflow involves the mechanical contractor installing pre-insulated 360 degree pipe supports at each structural hanger or clamp during the pipe installation process set at the correct elevations. Eliminates double labor.

Benefits

- High compressive strength thermoset phenolic foam does not crush easily compared to low compressive strength insulations.
- Phenolic foam is less dusty, light weight and fabricates easily with hand tools.
- The curved metal shield on the entire circumference of the insert allows for installation with any type of structural hanger including clevis hangers or strut clamps.
- Finished OEM product arrives to job site fully assembled and ready to install.
- Easily detailed by the insulator with 2" ASJ tape to ensure continuity of the vapor retarder.
- Buy American Act Certified

Safety

- Therma-Phen® does not contain asbestos
- CFC/HCFC free with zero ozone depletion potential (ODP)
- Thermoset plastic resistant to many common chemicals
- Non-fibrous or itchy, odorless and low dust
- Insulating cold piping will prevent surface condensation, dripping and subsequent water related slip, trip and falls.
- Maintains installed thickness without crushing to provide long term insulating performance.
- Supports the cladding to provide continuous protection against crushing, moisture infiltration, loss of insulation performance and the resultant potential for corrosion under insulation (CUI).

Iron Pipe Size	Max Load (lbs.)		A = Insulation Length						B = Gauge of Steel Jacket						Copper Tubing Size
	Flat Surface	Clevis Hanger	1/2” thick		1’ thick		1 1/2” thick		2’ thick		2 1/2” thick		3” thick		
			A	B	A	B	A	B	A	B	A	B	A	B	
3/8	40	40	6	24	6	24	6	24	6	24	6	24	6	24	5/8
1/2	40	40	6	24	6	24	6	24	6	24	6	24	6	24	7/8
3/4	40	45	6	24	6	24	6	24	6	24	6	24	6	24	1 1/8
1	55	65	6	24	6	24	6	24	6	24	6	24	6	24	1 3/8
1 1/4	70	80	6	24	6	24	6	24	6	24	6	24	6	24	1 5/8
1 1/2	90	100	6	20	6	20	6	20	6	20	6	20	6	20	XX
2	110	125	6	20	6	20	6	20	6	20	6	20	6	20	2 1/8
2 1/2	125	180	6	18	6	18	6	18	6	18	6	18	6	18	2 5/8
3	150	225	6	18	6	18	6	18	6	18	6	18	6	18	3 1/8
3 1/2	200	300	6	18	6	18	6	18	6	18	6	18	6	18	XX
4	250	300	6	16	6	16	6	16	6	16	6	16	6	16	4 1/8
5	See F-4000	490	6	16	6	16	6	16	6	16	6	16	6	16	XX
6		600	6	16	6	16	6	16	6	16	6	16	6	16	6 1/8
8		750	—	—	6	16	6	16	6	16	6	16	6	16	XX
10		875	—	—	9	16	9	16	9	16	9	16	9	16	XX
12		1000	—	—	9	16	9	16	9	16	9	16	9	16	XX

Full Carton Quantities (Standard Products): F-2000 Phenolic Foam				
Pipe Size	1/2” thickness	1” thickness	1 1/2” thickness	2” thickness
5/8”	32	32	18	10
1/2”	22	28	14	27
3/4”	18	28	14	27
1”	40	18	10	18
1 1/4”	32	18	27	18
1 1/2”	28	14	27	15
2 1/8”	24	14	27	15
2”	20	12	21	15
2 5/8”	18	12	21	15
2 1/2”	14	27	15	12
3 1/8”	14	27	15	12
3’	10	18	15	12
4 1/8”	27	15	12	6
4”	18	15	12	6
6 1/8”	12	6	6	6
6”	12	6	6	6
8”	4	4	4	4
10”	2	4	4	2
12"	2	2	2	2